

Product sheet

# Coda

## one-person acoustic booth

---

### Technical Data

- Ceiling - varnished MDF board, upholstered; fitted with lighting and fan;
  - Upholstered wall - sheet metal, 1 mm thick; filled with rebound foam, upholstered on the inside;
  - Shelf - MDF 19mm, frame - steel rod Ø6 mm; colour: black;
  - Glass wall - tempered glass 10 mm, aluminium profile 52 x 45 mm;
  - Glass door - tempered glass 10 mm, fittings: hinges, handle with key lock and gasket system;
  - Floor - MDF 31 mm + acoustic fitted carpet;
  - Ventilator - ceiling-mounted fan with airflow adjustment;
- 

### Selected configuration

#### CD01

**Height:** 2196 mm

**Width:** 1051 mm

**Length:** 1112 mm

**Colour of interior walls:** M-63017 Rusty

**Colour of exterior walls:** Beige semi-matte RAL 0608005

**Type of plug:** EU plug


---

### Sustainability

- The structural elements of the booths are powder-coated to reduce the emission of Volatile Organic Compounds.
- 

### Material composition

- MFC: 6%
  - MDF: 40%
- 

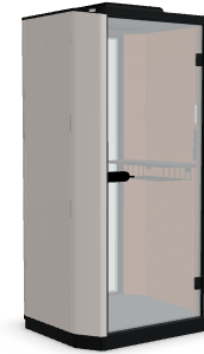

### Guarantee

.mdd products - 5 years.

Electrical components and fabric - 2 years.

- Plywood: 1%
- Steel: 28%
- Aluminium: 9%
- Glass: 4%
- Plastic: 2%
- Fabric: 2%
- Polyurethane foam: 7%
- Other: 2%

\*average values for a representative of the group.

---

## Recycled content

9%

---

## Recyclability


- Recyclable: 12%
- Downcyclable: 88%

\*average values for a representative of the group.

---

## Fabric technical data

### M-63017 Rusty

	<b>Material</b>	100% polyester
	<b>Weight</b>	364g/m <sup>2</sup> · 510g/lm
	<b>Abrasion resistance rubs</b>	75,000 Martindale cycles
	<b>Pilling resistance</b>	scale 1-5, max 5 · EN ISO 12945-2 4
	<b>Colour fastness to light</b>	scale 1-8, max 8 · EN ISO 105 - B02 5-7
	<b>Colour fastness to rubbing</b>	scale 1-5, max 5 · EN ISO 105x12 (wet/dry) 4-5/4-5
<b>Acoustic test sound absorption</b>	ISO 354	
<b>Flammability</b>	BS EN 1021 - 1:2006 (cigarette), BS EN 1021 - 2:2006 California Bulletin CAL 117-E-Class 1	